



KIT/N14P/4-F22A PoE Security Kit

4 Channel PoE NVR With 4 PoE Cameras

PoE Security Kit provides a complete set of monitoring devices to meet the needs of your home and business. Thanks to the Power over Ethernet technology, the recorder can provide both electricity and network for the cameras via a Ethernet cable.



1080P FHD



Human Detection



Audio Recording



Motion Detection



102° View



IP67 Weatherproof



Night Vision
30m/98ft



Mobile Alerts



Alarm Schedule



Alarm Zone



Geofencing



16x Digital Zoom



Cloud/NVR



PoE Connection




Record every second

Using a hard disk drive, recorder could uninterrupted record for a long time, and now easily store for more than a month by using the smart H.265 codec. You can play back the details of every time.



PoE Camera

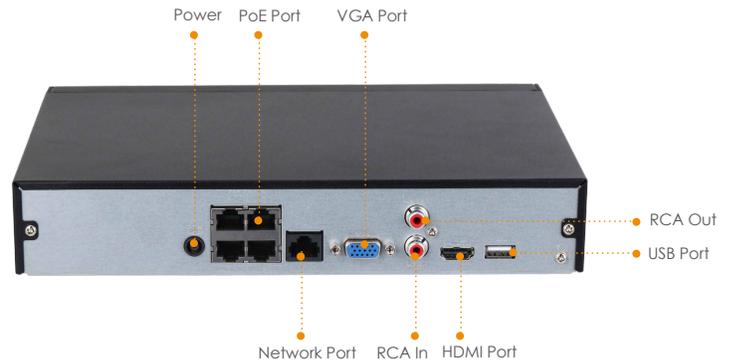

PoE Recorder

Specifications

Camera

Camera	
Image Sensor	1/2.8" Megapixel Progressive CMOS
Resolution	2MP(1920 x 1080)
Night Vision	30m(98ft) Distance
Field of View	2.8mm:102° (H), 54° (V), 120° (D)

Video & Audio

Video Compression	H.265/H.264
Frame Rate	Up to 25/30fps
Mic	Built-in Mic

Network

Ethernet	1 RJ-45 Port(10/100Mbps)
----------	--------------------------

General

Material	Plastic
Ingress Protection	IP67
Power Supply	PoE
Power Consumption	<3.5W
Working Environment	-30°C~+60°C, Less Than 95%RH

What's in the box

- 4x PoE Cameras
- 1x PoE NVR (Build-in 1TB HDD)
- 4x Ethernet Cables
- 1x Quick Start Guide

NVR

Video & Audio

Input	4 Channels access
Video Compression	H.265/H.264
Decoding Capacity	4ch@1080P
Display	VGA,HDMI(Up to 1080P Resolution)
Audio Compression	G.711A/G.711U/PCM/G726/AAC

Functions

OSD	Camera title, time, Camera lock, Motion detection, Recording
Record Mode	Manual/Alarm/Motion detection/Schedule
Detection	Motion video detection
Sync Playback	1/4 Channels
Backup Mode	USB Device/ App

Network

Ethernet	1 RJ-45 Port(10/100Mbps)
App	iOS / Android

Auxiliary Interface

SATA	1 SATA Port, up to 8TB
USB	2 Ports (2 USB 2.0)

General

Power Supply	DC48V 1.25A / DC53V 1.22 A
Power Consumption	≤10W(without HDD)
Working Environment	-10°C~+45°C, Less Than 95%RH

